


Group provider

The Group Provider tab allows you to configure the group providers if you want to use group synchronization with other systems.

Like in the [Source Configurations](#), you can choose between a database table and a LDAP system as source for the synchronization process.

Overview

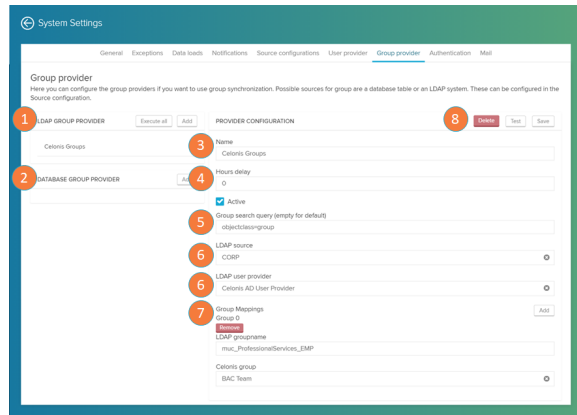

Here you can configure the LDAP or database sources that define the user synchronization.

1. LDAP sources: list of connected LDAP sources. LDAP sources are used to manage user and group permissions. Click on 'Execute all' to synchronize your users and on 'Add' to add a new source.
2. Database sources: list of connected database sources.
3. Name: define your source name.
4. Hours delay: delay between synchronization attempts. Mark the 'Active' box to activate automatic synchronizations.
5. LDAP source: defines the LDAP source from the list defined in the [Source Configurations](#).
6. LDAP user provider: defines the LDAP user provider from the list defined in the [User Provider](#).
7. Group mappings: define a mapping between the groups in the LDAP/Database source and the Celonis groups.
8. Config buttons: after you are done, click on 'Save' to save your source. The 'Test' button will evaluate the connection status.